


Use and Care Manual

Freezer for integrated use, dooron-door

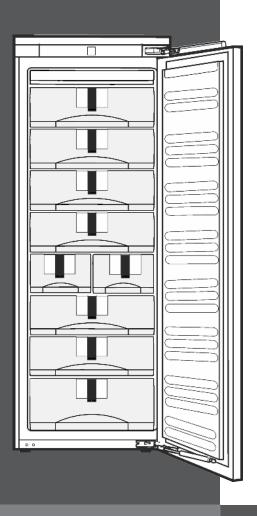

HF 861 061216 7086628 - 00

Contents

1 1.1 1.2 1.3 1.4 1.5	The appliance at a glance Additional benefits Overview of the appliance and accessories Range of appliance use Conformity Energy saving	2 3 3 3 3
2	General safety information	3
3 3.1 3.2	Controls and displays Operating and control elements Temperature display	5 5 5
4 4.1	Start-up Switching on the appliance	5 5
5 5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 5.12 5.13 5.14 5.15 5.16	Operation Temperature display unit Child-proof lock Door alarm Temperature alarm Sabbath Mode Freezing food Defrosting food Setting the temperature SuperFrost Drawers Shelves VarioSpace Pull-out rails Info system Refrigerant accumulators IceMaker	5 56666777788888999
6 6.1 6.2 6.3 6.4 6.5 6.6	Maintenance	10 10 10 11 11 11
7	Troubleshooting	12
8 8.1 8.2 8.3 8.4	Putting appliance out of service Vacation Tips Shut off the water intake Switching off the appliance Decommissioning	15 15 15 15 15
9	Disposing of the appliance	15
10	Liebherr Warranty Plan	15

Congratulations on the purchase of your new appliance. With this purchase, you have chosen all the advantages of the latest refrigeration technology, guaranteeing you a high-quality appliance with a long life span and high operating safety.

The equipment of your appliance gives you the highest level of day-to-day ease of operation.

Together we are making an active contribution to the conservation of our environment by purchasing this appliance which is manufactured in an environmentally friendly process with the use of recyclable materials.

We hope you enjoy your new appliance.

The manufacturer is constantly working to improve all models. Therefore please understand that we reserve the right to make design, equipment and technical modifications.

To get to know all the benefits of your new appliance, please read the information contained in these instructions carefully.

The instructions apply to several models, so there may be differences. Sections which only apply to certain appliances are indicated with an asterisk (*).

Instructions for action are marked with a \triangleright , the results of action are marked with a \triangleright .


1 The appliance at a glance

1.1 Additional benefits

- CFC free
- Energy-optimized refrigerant circuit
- Energy-efficient insulation
- Low energy consumption
- User-friendly electronic controls
- Temperature can be controlled in the appliance independent of ambient conditions according to its climate rating - Temperature can be displayed as °C or °F
- The appliance defrosts automatically no need to spend time defrosting
- Large freezing capacity
- Shelves can be removed to make space for large items.
- Freezer over-temperature alarm
- Quick-freeze feature for fresh food (SuperFrost)
- Frozen food temperature indicator
- Power failure/"frost-control" display
- All freezer drawers suitable for quick-freeze
- Bright LED interior light
- Door ajar alarm
- Handle grips on all extra-large drawers for easy transport
- Integrated transport grips on appliance housing
- Transport castors at back
- Easy to clean
- Door hinges can be reversed
- Door-on-door system for easy kitchen cabinet installation
- Soft stop mechanisms
- This unit is certified as Sabbath compliant by the Star-K organization thus allowing the appliance to be used during religious holidays. For more information please visit Star-K on the web at www.star-k.org.



1.2 Overview of the appliance and accessories

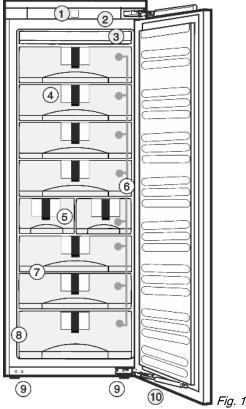

- (1) Operating and control elements
- (6) Drawers
- (2) Interior LED lighting
- (7) VarioSpace
- (3) NoFrost setting
- (8) Rating plate
- (4) Info system (5) IceMaker
- (9) Adjustable feet (10)Closing damper
- 1.3 Range of appliance use

Normal use

The appliance is only suitable for cooling food for residential or other similar environments. This includes the following types of uses

- in staff kitchens, bed and breakfasts,
- by guests in country homes, hotels, motels and other types of accommodations,
- for catering and similar wholesale services.

All other types of uses are not permitted.

Foreseeable misuse

The following uses are specifically prohibited:

- Storage and cooling of medication, blood plasma, laboratory preparations or similar substances and products in accordance with the CMDCAS and FDA 510(k)
- Use outdoors.

- Use in moist areas exposed to the rain.
- Use in areas at risk of explosion

Incorrect appliance use can cause damage to the stored products or cause them to spoil.

Climate ratings

The appliance is set to operate within specific ambient temperature limits according to its climate rating The climate rating for your appliance is printed on the rating plate

Note

► To guarantee trouble-free operation, comply with the indicated ambient temperatures.

Climate rating	for ambient temperatures
SN, N	to 90 °F (32 °C)
ST	to 101 °F (38 °C)
Т	to 110 °F (43 °C)

The appliance will function properly in ambient temperatures down to 41 °F (5 °C).

1.4 Conformity

The refrigerant circuit has been tested for leaks. When installed, the appliance complies with the relevant safety regulations and the safety standards CAN/CSA-C22.2 No. 60335-1-11, 60335-2-24-06 and UL 60335-1, UL 60335-2-24.

1.5 Energy saving

- Always ensure good ventilation. Do not obstruct ventilation openings or arilles.
- Never block air slits in the fan.
- Do not install the appliance in direct sunlight or next to an oven, heater, or similar heat source.
- Energy consumption depends on installation conditions such as the ambient temperature (see 1.3). If the ambient temperature differs from the standard temperature of 25 °C, energy consumption can change.
- Avoid opening the appliance door for any longer then necessary
- The lower the temperature is set the higher the energy consumption.
- Store food logically (see The appliance at a glance).
- All food stored in the appliance should be well wrapped and covered. This prevents frost buildup.
- Insertion of warm foods: first let the food cool down to room temperature.

2 General safety information

Read and follow these instructions. They contain safety advice which is important for safe and problem-free installation and operation. Always read and follow the safety advice.

Dangers for the user:

- This appliance can be operated by children 8 years and older as well as by persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they are supervised or have been instructed in the safe use of the appliance and understand the associated risks. Children must not play with the appliance. Cleaning and user maintenance must not be performed by children unless they are supervised. Children between the ages of 3 and 8 may load and unload the appliance. Children under the age of 3 must be kept away from the appliance if they are not constantly supervised.
- When disconnecting the appliance from the outlet, always take hold of the plug. Do not pull on the cable.
- Disconnect the power plug or switch off the power if a fault occurs.
- Do not damage the mains power line. Do not operate the appliance from a defective mains power line.
- Repairs, work on the appliance and replacement of the mains cable should only be carried out by the customer service department or other specifically trained specialist engineers.
- Only install, connect and dispose of the appliance in accordance with the instructions.
- Only operate the appliance after it has been installed.
- Please keep the instructions and pass them on to any future owner.
- All repairs to or work on the IceMaker must only be carried out by the customer service department or other specialist engineers trained to do this.
- The manufacturer is not liable for damage arising from incorrect connection to the water supply.
- Special-purpose lamps (filament lamps, LEDs, and fluorescent lamps) inside the appliance are intended to illuminate its interior compartments and are unsuitable for room illumination.

Risk of fire:

 The refrigerant contained within the appliance, R 600a, is environmentally friendly, but flammable. Leaking refrigerant can ignite.

- Do not damage the pipes of the refrigerant circuit.
- Do not handle naked flames or ignition sources inside the appliance.
- Do not use electrical devices inside the appliance (e.g. steam cleaners, heaters, ice cream makers, etc.).
- If refrigerant leaks: Remove naked flames or ignition sources located near the area of the leak. Air the room well. Contact the customer service department.
- Do not operate the appliance near explosive gases.
- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this appliance.
- Do not store explosive materials or spray cans with flammable propellants, such as e.g. butane, propane, pentane, etc. in the appliance. You can recognize such spray cans by the printed contents or a flame symbol. Any leaking gasses can be ignited by electrical components.
- Alcoholic beverages or other containers holding alcohol must always be tightly sealed for storage purposes. Any leaking alcohol can be ignited by electrical components

Tipover hazard:

- Do not stand or climb on the base, drawers, doors, etc. This applies in particular to children.

Risk of food poisoning:

- Do not consume food that has passed its best before date.

Danger of frostbite, feelings of numbness and pain:

- Avoid continued skin contact with the cold surfaces or chilled/frozen food or adopt protective measures, e. g. use gloves. Do not consume ice cream (especially sherbets) and ice cubes immediately when they are too cold.

Risk of injury and damage:

- Hot steam may lead to injuries. Do not use any electrical heating or steam cleaning equipment, naked flames or defrosting sprays for defrosting
- Do not remove ice with sharp objects

Risk of crushing:

- Do not hold onto the hinge when opening and closing the door. Fingers may get caught.

California Proposition 65

- This product contains chemicals known to the state of California to cause cancer or reproductive harm.

Symbols on the device:




The symbol can be on the compressor. It refers to the oil in the compressor and refers to the following danger: Can be lethal if swallowed or inhaled. This notice only applies for recycling. There is no danger during normal operation.

Follow the specific instructions in the other sections:

\triangle	DANGER	indicates a hazardous situation, which if not avoided, will result in death or serious injury.
\triangle	WARNING	indicates a hazardous situation, which if not avoided, could result in death or serious injury.
\triangle	CAUTION	indicates a hazardous situation, which if not avoided, will result in minor or moderate injury.
	NOTICE	indicates a hazardous situation, which if not avoided, could result in damage to property.
	Note	indicates useful advice and tips.

3 Controls and displays

3.1 Operating and control elements

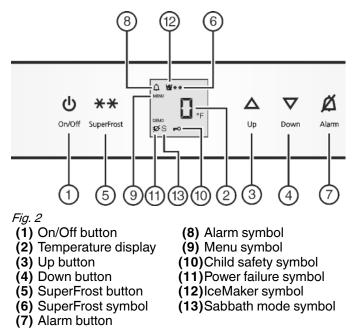

3.2 Temperature display

The following is displayed in normal operation:

- the highest freezer temperature

The temperature display flashes:

- the temperature setting has been changed
- once switched on the temperature is not cold enough
- the temperature has risen by several degrees

The following displays indicate malfunction. Possible causes and corrective actions: (see Troubleshooting).

- FO to F9

4 Start-up

4.1 Switching on the appliance

Note

- The manufacturer recommends:
- Store frozen produce at 0 °F (-18 °C) or colder.

Switch on the appliance approx. 2 hours before loading for the first time.

- Open the door.
- ▶ Press On/Off button *Fig. 2 (1)*.
- ▷ The temperature display and the Alarm symbol will flash until the temperature is cold enough. If the temperature is greater than 32 °F (0 °C), flashing dashes will appear; if the temperature is lower than this, the current temperature will flash on the display.
- \triangleright The interior light comes on when the door is opened.
- Whenever "DEMO" appears on the display, the appliance is running in demonstration mode. Contact the customer service department.

5 Operation

5.1 Temperature display unit

The temperature display can be changed from °F to °C.

5.1.1 To change the unit


- ► Activate setting mode: Press SuperFrost button *Fig. 2 (5)* for about 5 seconds.
- \triangleright **S** is displayed in the temperature display.
- \triangleright The Menu symbol *Fig. 2 (9)* lights up.
- ► Using Up button *Fig. 2 (3)*/ Down button *Fig. 2 (4)* select ⁺.
- To confirm: Briefly press SuperFrost button Fig. 2 (5).
- ► Using Up button *Fig. 2 (3)*/ Down button *Fig. 2 (4)* select °F or °C.
- ► To confirm: Briefly press SuperFrost button *Fig. 2 (5)*.

<u>קס</u>י

Operation

- ► To exit setting mode: Press On/Off button *Fig. 2 (1)*.
- ► Wait 5 minutes.
- > The temperature is again displayed in the temperature display.

5.2 Child-proof lock



5.2.1 Switching on the child-proof lock

- Activate setting mode: press and hold the SuperFrost button *Fig. 2 (5)* for approximately 5 s.
- \triangleright **S** is shown on the display.
- ▷ The Menu symbol *Fig. 2 (9)* lights up.
- ► Using the Up button *Fig. 2 (3)* or Down button *Fig. 2 (4)*, select c.
- Press the SuperFrost button Fig. 2 (5) briefly to confirm. When cl is shown on the display:
- ► To switch on the child-proof lock, press the SuperFrost button *Fig. 2 (5)* briefly.
- ▷ The Child safety symbol *Fig. 2 (10)* lights up. **c** flashes on the display.

When **c0** is shown on the display:

- ► To switch off the child-proof lock, press the SuperFrost button *Fig. 2 (5)* briefly.
- The Child safety symbol Fig. 2 (10) goes out. c flashes on the display.
- Deactivate setting mode: press the On/Off button Fig. 2 (1).
- -or-
- Wait 5 min.
- > The temperature is again displayed on the temperature display.

5.3 Door alarm

If the door is open for longer than 180 seconds, the acoustic warning sounds.

The acoustic warning stops automatically when the door is closed

5.3.1 Switching off the door alarm

The acoustic warning can be switched off when the door is open. The acoustic warning remains switched off as long as the door is open. When the door is closed, the alarm function is active again.

Press Alarm button Fig. 2 (7).

 \triangleright The door alarm stops.

5.4 Temperature alarm

If the freezer temperature is not cold enough, the audible warning sounds.

At the same time, the Alarm symbol *Fig. 2 (8)* will flash.

The cause of a temperature being too high may be:

- Hot fresh food was placed in the appliance.
- When sorting and removing food from the appliance, too much warm ambient air got in.
- The power was cut off for a while.
- The appliance is faulty.

The audible warning automatically ceases, the Alarm symbol *Fig. 2 (8)* goes out, and the temperature display stops flashing when the temperature is cold enough again.

If the alarm status remains: (see Troubleshooting).

Note

If the temperature is not cold enough, food may spoil.

Check the quality of the food. Do not consume spoiled food.

5.4.1 Switching off the temperature alarm

The acoustic warning can be switched off. When the temperature is cold enough again, the alarm function is active again.

Press Alarm button Fig. 2 (7).

 \triangleright The acoustic warning ceases.

5.5 Sabbath Mode

This function meets the religious requirements on the Sabbath and Jewish festivals. When the appliance is in Sabbath mode some control electronic functions are switched off. After setting Sabbath mode you no longer need to worry about indicator lights, figures, symbols, displays, alarm messages and fans. The thawing cycle only operates at the specified time without taking refrigerator use into account. After a power cut the appliance automatically switches on again in Sabbath mode.

Danger of food poisoning!

No record will be kept of a power failure during Sabbath Mode. Thus, during Sabbath mode, if a power failure occurs that you are not aware of, when the power comes back on, the unit will continue to be in Sabbath Mode but when Sabbath Mode is ended there will be no indication that a power failure occurred.

If a power failure occurs during Sabbath mode:

- Check the quality of the food. Do not consume spoiled food!
- All functions are blocked until Sabbath mode is switched off.



- If the unit is currently running in a mode such as Superfrost, Supercool or the Ventilation is enabled these functions will continue and finish their timed cycles independent of now being in Sabbath mode.
- The Ice Maker is disabled.
- No audible signals are emitted, and the temperature display does not indicate any warnings or settings (such as a temperature alarm or door alarm).
- Light does not operate.

5.5.1 Setting Sabbath mode

- ► To activate setting mode: Press and hold the Super-Frost button *Fig. 2 (5)* for approx. 5 s.
- Dash 5 flashes on the display.
- ▷ The Menu symbol *Fig. 2 (9)* lights up.
- ► To access the Sabbath mode function: Briefly press the SuperFrost button *Fig. 2 (5)*.
- When SI is shown on the display:
 To turn on Sabbath mode, briefly press the SuperFrost button *Fig. 2 (5)*.

When **50** is shown on the display:

- To turn off Sabbath mode, briefly press the SuperFrost button *Fig. 2 (5)*.
- ► To deactivate setting mode: Press the On/Off button *Fig. 2 (1).*

or-Wait 5 min.

- ▷ The Sabbath Mode symbol *Fig. 2 (13)* appears on the temperature display as long as Sabbath Mode is active.
- Sabbath mode switches off automatically after 120 hours if it is not manually switched off beforehand.

5.6 Freezing food

The top drawer can hold up to 11.02 lbs (5 kg); the other drawers can each hold up to 55.12 lbs (25 kg).

Each plate can hold 77.16 lbs (35 kg) of frozen food.

After the door is closed, a vacuum is created. After closing the door, wait about 1 minute, then the door is easier to open.

Danger of fire

Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.

There is a risk of injury from pieces of broken glass.
Bottles and cans containing drinks can split or crack when frozen. This applies in particular to carbonated drinks.
▶ Do not freeze bottles and cans containing drinks.

So that the food is rapidly frozen through to the core, do not exceed the following quantities per pack:

- fruit, vegetables up to 2.2 lb (1 kg)

- meat up to 5.51 lbs (2.5 kg)
- ▶ Pack the food in portions in freezer bags, reusable plastic, metal or aluminum containers.

5.7 Defrosting food

- in the fridge compartment
- in the microwave
- in the oven/fan oven
- at room temperature

Danger of food poisoning!

- Do not re-freeze defrosted food.
- Only take out the amount of food that is required. Use defrosted food as quickly as possible.

5.8 Setting the temperature

The appliance is set as standard for normal operation.

- The temperature is adjustable across a range of 7 $^\circ\text{F}$ (-14 $^\circ\text{C})$ to -15 $^\circ\text{F}$ (-28 $^\circ\text{C}), and the advisable range is 0 <math display="inline">^\circ\text{F}$ (-18 $^\circ\text{C}).$
- ► To set a higher temperature: press the Up button *Fig. 2 (3)*.
- ► To set a lower temperature: press the Down button *Fig. 2 (4)*.
- > When the button is pressed for the first time, the previous value is indicated on the temperature display.
- ► To change the temperature in 1 °F (1 °C) increments: briefly press the button.

-or-

- ► To change the temperature continuously: hold the button down.
- \triangleright The value is displayed flashing during the setting operation.
- ▷ The actual temperature is displayed about 5 seconds after the last press of a button. The temperature slowly adjusts to the new setting.

5.9 SuperFrost

* *

With this function you can rapidly freeze fresh food through to the core. The appliance works with maximum refrigerating performance. The sound of the refrigeration unit may be temporarily louder as a result.

Depending on how much fresh food is to be frozen you must switch SuperFrost on in advance - for a small amount of food to be frozen, about 6 hours, for the maximum amount about 24 hours before putting the food in.

Package the food and place it inside across as wide an area as possible. Do not bring food that is to be frozen into contact with products that are already frozen to prevent these items from starting to thaw.

Operation

You do not need to switch SuperFrost on in the following cases:

- when placing frozen food in the freezer
- when freezing up to about 2 kg of fresh food a day

5.9.1 Freezing with SuperFrost

- ▶ Briefly press the SuperFrost button *Fig. 2 (5)* once.
- ▷ The SuperFrost symbol *Fig. 2 (6)* lights up.
- The freezing temperature drops and the appliance operates at its maximum refrigeration power rating. When a small amount of food is to be frozen.
- Wait approx. 6 hrs.
- Place packaged food in the deep lower drawers. When the maximum amount of food is to be frozen.
- ▶ Wait approx. 24 hrs.
- Remove lower deep drawers and place the food directly onto the lower shelves.
- SuperFrost is automatically switched off. At the earliest after 30 hours, at the latest after 65 hours, depending on the quantity placed inside the appliance.
- ▷ The SuperFrost symbol *Fig. 2 (6)* goes out when the freezing process is complete.
- Place food inside the drawers and push them closed again.
- > The appliance returns to work in the energy-saving normal mode.

5.10 Drawers

Note

Insufficient ventilation results in an increase in energy consumption and reduction of the refrigerating performance

▶ Never block the air slits in the fan on the rear wall.




Fig. 3





Fig. 4

To store frozen food directly on the shelves: raise the drawer at the back and pull it out forwards.


5.11 Shelves

- ► To remove shelf: lift it at the front and pull out forward.
- To reinsert shelf: simply slide it in as far as it will go.



5.12 VarioSpace


In addition to the drawers, you can also take out the shelves. This gives you space for large frozen items. Poultry, meat, large joints of game and tall bakery items can be frozen and then presented whole.



- The top drawer can hold up to 11.02 lbs (5 kg); the other drawers can each hold up to 55.12 lbs (25 kg).
- Each plate can hold 77.16 lbs (35 kg) of frozen food.


5.13 Pull-out rails


► To clean the glass plates, remove the **pull-out rails**: Push the front detent hook upward (1) and push the pullout rail to the side (2) and toward the back (3).



► To insert the pull-out rails: hook the rail in at the back (1) and snap it into place at the front (2).

5.14 Info system





(1) Ice cubes


The numbers indicate the storage time in months for different types of frozen foods. The storage times given are guidelines.

5.15 Refrigerant accumulators

These refrigerant accumulators prevent the temperature from rising too fast when power failures occur.

5.15.1 Using refrigerant accumulators

Place the frozen refrigerant accumulators in the top front area of the freezer compartment on top of the freezer goods.




5.16 IceMaker

The IceMaker is located in the fifth drawer compartment from the top. The drawer is labeled "IceMaker".

Make sure that the following conditions are fulfilled:

- The appliance is level.
- The appliance is connected to the electricity supply.
- The minimum freezer temperature is 14 °F (-10 °C).
- The IceMaker is connected to the water supply.
- All air was bled from the waterline before starting the icemaker. The icemaker will only work if there is no air in the waterline.

5.16.1 Switching on the IceMaker



- Pull out the drawer.
- Press On/Off button Fig. 7 (1) so that the LED Fig. 7 (2) lights up.
- Push in the drawer.
- > The IceMaker symbol Fig. 2 (12) shines.

Note

The IceMaker only produces ice cubes when the drawer is completely closed.

5.16.2 Producing ice cubes

The production capacity depends on the freezer temperature. The lower the temperature, the more ice cubes can be produced in a certain period.

The production capacity is 90- 100 ice cubes in 24 hours at a freezing temperature of 0 $^{\circ}$ F (-18 $^{\circ}$ C).

To have the maximum capacity of approx. 130 ice cubes in 24 hours, activate the SuperFrost Function. Be aware that this increases the energy consumption because the compressor will run constantly.

The ice cubes fall out of the IceMaker into the drawer. When the ice cubes reach a certain height in the drawer, no more ice cubes can be produced. The IceMaker will not fill the drawer to the top.

If large quantities of ice cubes are required, the complete IceMaker drawer can be swapped with the neighboring drawer. When you close the drawer, the IceMaker automatically restarts production.

When the IceMaker is switched on for the first time, it may take up to 24 hours for the first ice cubes to be produced.

Note

Particles may accumulate in the IceMaker or water line the first time the appliance is used or after an extended period out of service.

► To achieve this, do not consume or use the ice cubes that are produced within 24 hours.

5.16.3 Setting the water supply time

The opening time of the valve on the IceMaker can be adjusted if, for example, the water pressure in the pipe is too low or too high.

The water supply time can be set in stages from **EI** (short supply time) to **EB** (long supply time). The default setting is **E3**.

- ► Activate setting mode: press and hold the SuperFrost button *Fig. 2 (5)* for approximately 5 s.
- \triangleright **S** is shown on the display.
- ▷ The Menu symbol *Fig. 2 (9)* lights up.
- ► Using the Up button *Fig. 2 (3)* or Down button *Fig. 2 (4)*, select **E**.
- ▶ To confirm: briefly press the SuperFrost button Fig. 2 (5).
- ► To increase the water supply time: press the Up button *Fig. 2 (3)*.
- ► To decrease the water supply time: press the Down button *Fig. 2 (4)*.
- ► To confirm: press the SuperFrost button *Fig. 2 (5).*
- Deactivate setting mode: press the On/Off button Fig. 2 (1).
- -or-
- Wait 5 mins.
- > The temperature is again displayed on the temperature display.

5.16.4 Switching off the IceMaker

When the IceMaker is switched off, the drawer of the IceMaker can also be used for freezing and storing food.

- Press the On/Off button for about 1 second until the LED goes out.
- ▷ The IceMaker symbol *Fig. 2 (12)* goes out.
- Clean the IceMaker.
- > This ensures that no water or ice remains in the IceMaker.


6 Maintenance

6.1 Replacing the water filter

When used as indicated, the water filter should be replaced at least every 6 months or whenever you notice a considerable decrease in the flow rate.

Your nearest dealer can be located by visiting us online at **www.Liebherr.com**.

The used water filter contains activated carbon and can be disposed of with normal household waste.



To remove the old water filter:

- ▶ Pull out the tray Fig. 8 (1), if necessary.
- Remove the filter cover Fig. 8 (2).
- ► Turn the water filter *Fig. 8 (3)* approximately 100° counterclockwise and pull it out.
- Catch any dripping water with your hand, towel or with a dish.




Fig. 9

To install a new water filter:

- ▶ Insert the water filter *Fig. 9 (3)* and turn it approximately 100° clockwise until it locks into position.
- ▶ Slide the tray *Fig. 9 (1)* in.
- ▶ Place the cover *Fig. 9 (2)* on the filter.
- ▶ Write the date of the next filter replacement on the supplied adhesive label *Fig. 9 (4)* and affix it to the module.

Note

New water filters may contain particulate matter.

- Do not consume or use ice cubes produced within 72 hours after replacing the filter.
- Remove any ice still present in the IceMaker tray. You can keep this ice in another tray for later use.
- Make sure the filter is leak-tight and no water is coming out.

6.2 Defrosting with NoFrost

Risk of injury and damage

- Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- Do not use any electrical heating or steam cleaning equipment, naked flames or defrosting sprays for defrosting.
- Do not remove ice with sharp objects.
- ► Do not damage the pipes of the refrigerant circuit.

The NoFrost system defrosts the appliance automatically. The moisture condenses on the evaporator and is periodically defrosted and evaporated.

The appliance does not need to be defrosted manually.

6.3 Cleaning the appliance



Danger of electric shock.
 Unplug refrigerator or disconnect power.

· Onplug reingerator of disconnect po

Danger of fire

Do not damage the refrigerant circuit.

Risk of injury or damage due to hot steam.

Hot steam can cause scalding/burns and damage to surfaces.

Do not use steam cleaners.

NOTICE

Incorrect cleaning damages the appliance.

- Do not use concentrated cleaning agents.
- Do not use steel wool or sponges that scour or scratch.
 Do not use caustic or abrasive cleaning materials or these containing acred chloride or scide.
- those containing sand, chloride, or acids.
- Do not use chemical solvents.
- Do not damage or remove the rating plate on the inside of the appliance. It is vital for the customer service department.
- Do not pull off, kink or damage any cables or other components.
- Do not let cleaning water get into the drain gutter, the ventilation grille and electrical parts.
- Use soft cleaning cloths and a multi-purpose cleaning agent with a neutral pH value.
- Only use food-compatible cleaning and care agents inside the appliance.

Empty the appliance.

Disconnect the power plug.



- Clean the ventilation grilles regularly.
- Dust deposits increase energy consumption.
- Clean the plastic surfaces, outside and inside, by hand using lukewarm water and a little dish washing liquid.
- Clean fittings by hand using lukewarm water and a little dish washing liquid.
- Clean the telescopic rails with a damp cloth only. The grease in the tracks is for lubrication purposes and should not be removed.

After cleaning:

- ► Wipe the appliance and accessories dry.
- Connect the appliance and switch it on again.
- Switch on SuperFrost (see 5.9). When the temperature is sufficiently cold:
- put the food back in the appliance.

6.4 Cleaning the IceMaker

The IceMaker drawer must be emptied and pushed in.

- Activate setting mode: press and hold the SuperFrost button *Fig. 2 (5)* for approximately 5 s.
- \triangleright **S** is shown on the display.
- \triangleright The Menu symbol *Fig. 2 (9)* lights up.
- ► Using the Up button *Fig. 2 (3)*/ Down button *Fig. 2 (4)*, select **I**.
- ► To confirm: press the SuperFrost button *Fig. 2 (5)*.
- ► Using the Up button *Fig. 2 (3)*/ Down button *Fig. 2 (4)*, select **Ic**.
- ► To confirm: press the SuperFrost button Fig. 2 (5).
- > The IceMaker moves into cleaning position and shuts off.
- ► Deactivate setting mode: press the On/Off button *Fig. 2 (1)*.

or-Wait 2 min.

- > The temperature is again displayed on the temperature display.
- Take out the drawer.
- Clean the ice compartment and drawer with warm water. If necessary, use a mild dishwashing liquid. Then rinse.
- Slide the drawer back in.
- ► Leave the IceMaker switched off in this position.
- -or-

NOTICE

Residual dishwashing liquid in the ice tray and drawer. Nausea or irritation of the mucous membrane.

- Eliminate any residual dishwashing liquid: Throw away the first three batches of ice cubes.
- Switching on the IceMaker (see 5.16).

6.5 Customer service

First check whether you can remedy the fault yourself (see Troubleshooting). If this is not the case, please contact a qualified service provider.

Risk of injury from repairs by non-professionals.

- Repairs and work on the appliance and the power supply cable not described in the Manual (see Maintenance) should only be carried out by a qualified service provider.
- Read the appliance designation *Fig. 10 (1)*, service no. *Fig. 10 (2)* and serial no. *Fig. 10 (3)* from the rating plate. The

rating plate is located

inside the appliance

on the left-hand side.




Fig. 10

- ▶ Notify a qualified service provider, specifying the fault, appliance designation *Fig. 10 (1)*, service no. *Fig. 10 (2)* and serial *Fig. 10 (3)* no.
- This will help us to provide you with a faster and more accurate service.
- Keep the appliance closed until the Customer Service engineer arrives.
- \triangleright The food will stay cool longer.
- Disconnect the power plug (do not pull on the power cord to do this) or switch off the fuse.

6.6 Appliance Information

Make a note of this information when the appliance is installed:

Type Designation:

Troubleshooting.

Service Number:	
Appliance / Serial Number:	
Date of purchase:	
Where purchased:	

less occurs during operation, please determine if the malfunction is due to an operating error. If a service call determines operator error, you will be charged for the costs incurred, even during the warranty period. You may be able to rectify the following problems yourself:

7 Troubleshooting.

Your appliance is designed and manufactured for reliable operation and a long lifespan. If a malfunction nonethe-

Problem	Possible Cause	Correction
The appliance	The appliance is not switched on.	Switch on the appliance.
does not work.	The power plug is not properly inserted in the wall socket.	 Check the power plug.
	The fuse in the wall socket is not OK.	Check the fuse.
	Power failure	 Keep the appliance closed. Protect the food: place dry ice on top of the food or use an alternate freezer, if the power failure persists for some time. Do not re-freeze defrosted food.
The compressor runs for a long time.	When less refrigeration is required, the speed-controlled compressor switches to a low speed. Although the running time is increased as a result, energy is saved.	 This is normal in energy-saving models.
	SuperFrost function is activated.	The compressor runs long to rapidly freeze food. This is normal.
An LED at the lower rear of the appliance (near the compressor) flashes regularly every 5 seconds*.	There is a fault.	Contact the customer service department (see Main- tenance).
Noises are too Ioud.	The different speed levels of speed- controlled* compressors can cause them to generate various noises during operation.	These noises are normal.
A gurgling sound	This sound comes from the refrig- erant flowing in the refrigeration circuit.	The sound is normal.
A faint clicking sound	The sound always occurs when the refrigeration unit (the motor) automatically switches on or off.	The sound is normal.
A hum. It is briefly a little louder when the refrigeration unit	The refrigeration increases automati- cally when the SuperFrost function is activated, fresh food has just been	The sound is normal.

Problem	Possible Cause	Correction
(the motor) switches on.	placed in the appliance or the door has been left open for a while.	
	The ambient temperature is too high.	Solution: (see 1.3)
A low hum	The sound occurs as a result of fan air flow.	The sound is normal.
Vibration noise	The appliance is not standing firmly on the floor. As a result, objects and adjoining units are set into vibration by the running refrigeration unit.	
Flow noise on the soft stop mechanism.	The sound is caused by the soft stop mechanism.	The sound is normal.
The temperature display indi- cates: F0 to F9.	There is a fault.	 Contact the customer service department (see Main- tenance).
The temperature display shows a flashing power failure symbol →. The warmest temper- ature reached during the power failure is displayed in the temperature display.	The freezer temperature rose too high during the last hours or days due to power failure or power inter- ruption. When the power interruption is over, the appliance will continue to operate at the last temperature setting.	 To delete the display of the warmest temperature: Press the Alarm button <i>Fig. 2 (7)</i>. Check the quality of the food. Do not consume spoiled food. Do not re-freeze defrosted food.
DEMO lights up in the tempera- ture display.	The demo mode is activated.	 Contact the customer service department (see Main- tenance).
The outside surfaces of the appliance are hot*.	The heat of the refrigerant circuit is used to prevent condensate from forming.	► This is normal.
The IceMaker cannot be switched on.	The appliance and therefore the IceMaker are not connected.	 Connect the appliance (see Start-up).
The IceMaker is	The IceMaker is not switched on.	Switch the IceMaker on.
not making ice cubes.	The drawer of the IceMaker is not properly closed.	 Close the drawer properly.
	The water connection is not open.	Open the water connection.
	The water supply to the IceMaker was interrupted.	Assembly Instructions, Connecting the Water Supply). ► Check the pipes and hoses (see the Assembly
		Check the pipes and hoses (see the Assemb Instructions, Connecting the Water Supply).

Troubleshooting.

Problem	Possible Cause	Correction
	There is a blocked filter at the end of the water supply hose or at the connecting part on the machine.	 Clean the filters.
	The waterline was not bled of all air during installation	Please contact your qualified installation plumber to ensure the above criteria is met before calling for service.
The temperature is not cold	The door of the appliance is not closed properly.	 Close the appliance door.
enough.	Insufficient ventilation.	Clear and clean the ventilation grille.
	The ambient temperature is too high.	► Solution: (see 1.3)
	The appliance was opened too frequently or for too long.	Wait to see whether the required temperature resets itself by itself. If not, contact the customer service department (see Maintenance).
	Too much fresh food was placed inside without SuperFrost.	 Solution: (see 5.9)
	The temperature is incorrectly set.	Set to a colder temperature and check after 24 hours
	The appliance is too near to a heat source (stove, heater etc).	Change location of appliance or the heat source.
	The appliance was not properly installed in the recess.	Make sure the appliance was installed correctly and the door closes properly.
The interior light	The appliance is not switched on.	 Switch on the appliance.
does not turn on.	The door was open for longer than 15 min.	The interior light automatically switches itself off if the door remains open for approx. 15 min.
	The LED interior light is faulty or the cover is damaged:	 ★ WARNING Risk of injury from electrical shock. Live parts are under the cover. The LED interior light should only be replaced or repaired by the Customer Service department or by engineers trained to do so.
		 WARNING Risk of injury from LED lamp! The lighting intensity of the LED light complies with laser class 1/1M. If the cover is faulty: ▶ Do not gaze directly at this lighting unit with optical lenses while very close to the light source. This can cause damage to your eyes.
The door seal is faulty or needs to be replaced for other reasons.	On some appliances the door seal is interchangeable. You can replace it without the use of any special tools.	

Problem	Possible Cause	Correction
The appliance is iced up or condensation is building.	The door seal may have slipped out of its groove.	Check the door seal is well placed in the groove.

8 Putting appliance out of service

8.1 Vacation Tips

Short vacations: If you will be away for less than four weeks

- Turn off the icemaker.
- Shut down the water supply to the icemaker.

Long vacations: If you will be away for a month or more

- ► Remove all food from the appliance.
- Turn OFF the appliance.
 Clean the appliance (appliance)
- Clean the appliance (see 6.3).
- Leave the door open to prevent unpleasant odors.
- \triangleright This will also keep mold from building up.
- Turn off the icemaker.
- Shut off the water supply to the icemaker.

8.2 Shut off the water intake

NOTICE

Malfunction of the water intake!

If the water intake is shut off during operation but the IceMaker remains in operation, the water intake pipe may ice up.


Switch off the IceMaker if the water supply is interrupted (e.g. holiday).

8.3 Switching off the appliance

- Press and hold down the On/Off button Fig. 2 (1) for approx. 2 seconds.
- ▷ A long beep sounds. The temperature display is dark. The appliance is switched off.
- \triangleright If the device does not switch off, the child safety feature is enabled (see 5.2) .

8.4 Decommissioning

- Empty the appliance.
- Put the IceMaker in the cleaning position (see Maintenance).
- Switch off the appliance (see Putting appliance out of service).
- Pull out the power plug.
- Clean the appliance (see 6.3).



9 Disposing of the appliance

Follow the local regulations for the disposal of appliances. Old appliances can be dangerous. Contact the local refuse collection department for additional information.



There is a risk of suffocation.

Children playing can shut themselves in and suffocate.

- ► Take the door(s) off.
- Remove the drawers.
- Leave the storage shelves in the appliance so that children cannot easily climb into the appliance.

Danger of electric shock.

- Cut off the plug from the power cord and discard.
- Cut off the power cord from the discarded appliance. Dispose of separately from the appliance.

Ensure during and after disposal that the appliance isn't stored in the vicinity of gasoline or other flammable vapors and liquids.

When disposing of the appliance, ensure that the refrigeration circuit is not damaged to prevent uncontrolled escape of the refrigerant it contains (data on type plate) and oil.

10 Liebherr Warranty Plan

FULL TWO YEAR WARRANTY - For two years from the date of original purchase, your Liebherr warranty covers all parts and labor to repair or replace any part of the product which proves to be defective in materials or work-manship.

FULL FIVE YEAR WARRANTY - For five years from the date of original purchase, your Liebherr warranty covers all parts and labor to repair or replace any components that prove to be defective in materials or workmanship in the sealed system. The "Sealed System" means only the compressor, condenser, evaporator, drier and all connecting tubing.

LIMITED 6TH THROUGH 12TH YEAR WARRANTY -From the 6th through 12th year from the date of original purchase, your Liebherr warranty covers all parts that prove to be defective in materials or workmanship in the Sealed System (parts only).

TERMS APPLICABLE TO EACH WARRANTY

All service provided by Liebherr under the warranty must be performed by authorized Liebherr service representatives, unless otherwise specified by Liebherr. Service will be provided in the home during normal business hours. This warranty applies only to products installed for normal residential use. Details regarding a non-residential warranty are available on request.

The warranty applies only to products installed in any one of the fifty states of the United States or the District of Columbia. The warranty does not cover any parts or labor to correct any defect caused by negligence, accident or improper use, maintenance, installation, service or repair, including but not limited to improper removal and reinstallation of the condensing unit.

THE WARRANTIES DESCRIBED ABOVE ARE MADE EXPRESSLY IN LIEU OF ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND OF ANY OTHER OBLIGATION OR LIABILITY ON THE PART OF LIEB-HERR. IN NO EVENT SHALL LIEBHERR BE LIABLE FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM THE BREACH OF THESE WARRANTIES OR ANY OTHER WARRANTIES, WHETHER EXPRESS, IMPLIED OR STATUTORY.

Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other legal rights which very from state to state.

To receive parts and/or service and the name of the Liebherr authorized service representative nearest you, contact your Liebherr dealer or distributor or contact the Liebherr designated national service provider:

in the US: Service-appliances.us@liebherr.com or call 1-866-LIEBHER (1-866-543-2437).

in Canada: www.euro-parts.ca or call 1-888-LIEBHER (1-888-543-2437).

For Service in the U.S.:

Liebherr Service Center

Toll Free: 1-866-LIEBHER or 1-866-543-2437

Service-appliances.us@liebherr.com PlusOne Solutions, Inc. 3501 Quadrangle Blvd, Suite 120 Orlando, FL 32817

For Service in Canada:

Liebherr Service Center

Toll Free: 1-888-LIEBHER or 1-888-543-2437

www.euro-parts.ca EURO-PARTS CANADA 39822 Belgrave Road Belgrave, Ontario, NOG 1E0 Phone: (519) 357-3320 Fax: (519) 357-1326



www.liebherr-appliances.com